



GE--AW

AXIAL BALL JOINTS
ROTULES AXIALES
AXIALKUGELGELENKE




ISO 12240-3
ESENTI DA MANUTENZIONE
ACCOPIAMENTO: CROMO DURO SU PTFE

NO SERVICE REQUIRED
COUPLING: HARD CHROME ON PTFE

PIECES A NE PAS ENTRETENIR
ACCOUPLEMENT: CHROME DUR DUR PTFES

WARTUNGSFREI
HARTCHROM AUF STAHL

MATERIALE DI STRISCIAMENTO:
TESSUTO PTFE

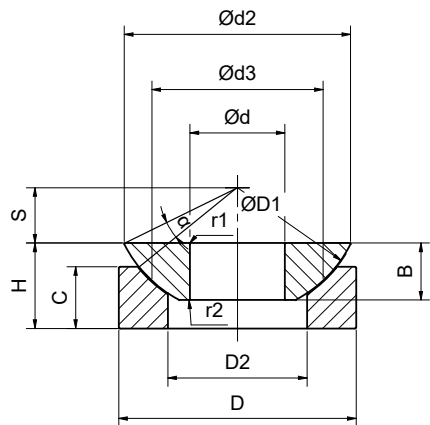

ART.	d	tolleranza d	D	tolleranza D	H	tolleranza H	D1	D2	d2	d3	B	tolleranza B	C	tolleranza C
	mm.													
GE 10 AW	10	+0 -0,008	30	+0 -0,009	9,5		32	16,5	27,5	21	7,9		6	
GE 12 AW	12		35	+0 -0,011	13		37	19,5	32	24	9,3		9	
GE 15 AW	15		42		15		45	24	38,9	29	10,7		11	
GE 17 AW	17	+0 -0,010	47	+0 -0,013	16		50	28	43,4	34	1,5	+0 -0,24	11,5	+0 -0,24
GE 20 AW	20		55		20		60	33,5	50	40	14,3		13	
GE 25 AW	25		62		22,5		66	34,5	57,5	45	16		17	
GE 30 AW	30	+0 -0,012	75	+0 -0,015	26	+0 -0,30	80	44	69	56	18	+0 -0,24	19,5	+0 -0,24
GE 35 AW	35		90		28		98	52	84	66	22		20	
GE 40 AW	40		105		32		114	59	98	78	27		22	
GE 45 AW	45	+0 -0,018	120	+0 -0,018	36,5		130	68	112	89	31	+0 -0,3	25	+0 -0,3
GE 50 AW	50		130		42,5		140	69	122,5	98	33,5		32	
GE 60 AW	60		150		45		160	86	140	108	37		33	
GE 70 AW	70	+0 -0,020	160	+0 -0,025	50	+0 -0,40	170	95	149,5	121	40	+0 -0,40	36	+0 -0,40
GE 80 AW	80		180		50		194	108	168	131	42		36	
GE 100 AW	100		210		59		220	133	195,5	155	50		42	
GE 120 AW	120	+0 -0,025	230	+0 -0,030	64	+0 -0,50	245	154	214	170	52	+0 -0,50	45	+0 -0,50
GE 140 AW(▲)	140		260		72		272	176	244	198	61		50	
GE 140 AW(▲)	160		290		77		310	199	272	213	65		52	
GE 180 AW(▲)	180	+0 -0,030	320	+0 -0,040	86	+0 -0,60	335	224	300	240	70	+0 -0,60	60	+0 -0,60
GE 200 AW(▲)	200		340		87		358	246	321	265	74		60	
GE 220 AW(▲)	220		370		97		388	265	350	289	82		67	
GE 240 AW(▲)	240	+0 -0,035	400	+0 -0,045	103	+0 -0,70	420	294	382	314	87	+0 -0,70	73	+0 -0,70
GE 260 AW(▲)	260		430		115		449	317	409	336	95		80	
GE 280 AW(▲)	280		460		110		480	337	445	366	100		85	
GE 300 AW(▲)	300	+0 -0,04	480	+0 -0,05	110	+0 -0,80	490	356	460	388	100	+0 -0,80	90	+0 -0,80
GE 320 AW(▲)	320		520		116		540	380	500	405	105		91	
GE 340 AW(▲)	340		540		116		550	380	510	432	105		91	
GE 360 AW(▲)	360		560		125		575	400	535	452	115		95	

DISPONIBILI SU RICHIESTA DISEGNI IN 3D.

3D VERSION AVAILABLE UPON REQUEST.

VERSION 3D DISPONIBLE SUR DEMANDE.

3D VERSION AUF ANFRAGE VERFÜGBAR.

(▲) DISPONIBILITÀ E PREZZO A RICHIESTA.

(▲) AVAILABILITY AND PRICE UPON REQUEST.

(▲) DISPONIBILITÉ ET PRIX SUR DEMANDE.

(▲) VERFÜGBARKEIT UND PREIS AUF ANFRAGE.

d	s	α	COEFF. DI CARICO (ASSIALE)		DISTANZA DAGLI SPIGOLI		DIMENSIONI DI MONTAGGIO		PESO
		Dinam. C	Stat. Co	r1 min.	r2 min.	d _A max.	D _A max.		
		gradi	KN		mm.		mm.	mm.	Kg.
10	7	10	36	72	0,6	- 0,2	21	18,5	0,04
12	8	9	49	98	0,6	- 0,2	24	21,5	0,07
15	10	7	78	156	0,6	- 0,2	29	26	0,12
17	11	6	88	176	0,6	- 0,15	34	30,5	0,16
20	12,5	6	112	224	1,0	- 0,3	40	38	0,25
25	14	7	193	390	1,0	- 0,3	45	39	0,38
30	17,5	6	255	510	1,0	- 0,3	56	49	0,65
35	22	6	390	780	1,0	- 0,3	66	57	1,0
40	24,5	6	560	1120	1,0	- 0,3	78	64	1,6
45	27,5	6	735	1460	1,0	- 0,3	89	74	2,4
50	30	5	980	1960	1,0	- 0,3	98	75	3,3
60	35	7	1100	2200	1,0	- 0,3	108	92	4,5
70	35	6	1200	2400	1,0	- 0,3	121	102	5,5
80	42,5	6	1560	3100	1,0	- 0,3	130	115	7,0
100	45	7	1800	3600	1,0	- 0,3	155	141	10,5
120	52,5	8	1860	3750	1,0	- 0,3	170	162	13,0
140	52,5	6	2450	4900	1,5	- 0,6	198	187	18,0
160	65	7	2850	5700	1,5	- 0,6	213	211	23,0
180	67,5	8	3200	6400	1,5	- 0,6	240	236	31,0
200	70	8	3550	7100	1,5	- 0,6	265	259	34,0
220	75	7	4400	8800	1,5	- 0,6	289	279	44,5
240	77,5	6	5200	10400	1,5	- 0,6	314	309	55,0
260	82,5	7	5400	10800	1,5	- 0,6	336	332	69,0
280	80	4	8500	17000	3,0	- 1,0	366	355	82,0
300	80	3,5	8650	17300	3,0	- 1,0	388	375	87,0
320	95	4	10600	21200	4,0	- 1,1	405	402	109,0
340	95	4	11800	23600	4,0	- 1,1	432	402	114,0
360	95	4	12700	25500	4,0	- 1,1	452	422	129,0