



GE--FW GE--FW-2RS

RADIAL BALL JOINTS ROTULES RADIALKUGELGELENKE

ISO 12240-1, SERIE G
ESENTI DA MANUTENZIONE
ACCOPIAMENTO: CROMO DURO SU PTFE




ISO 12240-1, G SERIES
NO SERVICE REQUIRED
COUPLING: HARD CHROME ON PTFE

ISO 12240-1, SERIE G
PIECES A NE PAS ENTREtenir
ACCOUPEMENT: CHROME DUR SUR PTFE

ISO 12240-1, SERIE G
WARTUNGsfREI
HARTCHROM AUF STAHL

MATERIALE DI STRISCIAMENTO:

- GE--FW COMPOSITO PTFE
- GE--FW - 2RS TESSUTO PTFE

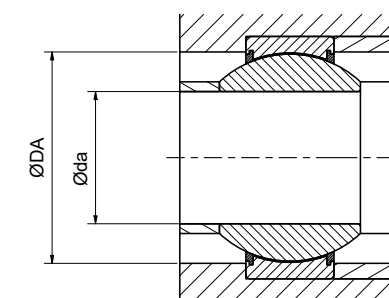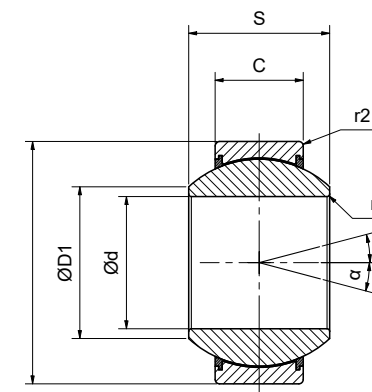

ART. Cuscinetto senza tenuta	ART. Cuscinetto con tenuta	d	tolleranza d	D	tolleranza D	S	tolleranza S	C	tolleranza C	d	D1	α
mm.										mm.		
										gradi		
GE 6 FW		6		16	0 -0,008	9		5		6	13	21
GE 8 FW		8		19		11		6		8	16	21
GE 10 FW		10		22		12		7		10	18	18
GE 12 FW		12	0 -0,008	26	0 -0,009	15		9	0 -0,24	12	22	18
GE 15 FW	GE 15 FW - 2RS	15		30		16		10		15	25	16
GE 17 FW	GE 17 FW - 2RS	17		35		20		12		17	29	19
GE 20 FW	GE 20 FW - 2RS	20		42	0 -0,011	25	0 -0,12	16		20	35	17
GE 25 FW	GE 25 FW - 2RS	25	0 -0,010	47		28		18		25	40	17
GE 30 FW	GE 30 FW - 2RS	30		55		32		20		30	47	17
	GE 35 FW - 2RS	35		62	0 -0,013	35		22	0 -0,30	35	53	16
	GE 40 FW - 2RS	40		68		40		25		40	60	17
	GE 45 FW - 2RS	45	0 -0,012	75		43		28		45	66	15
	GE 50 FW - 2RS	50		90	0 -0,015	56		36	0 -0,40	50	80	17
	GE 60 FW - 2RS	60		105		63	0 -0,15	40		60	92	17
	GE 70 FW - 2RS	70	0 -0,015	120		70		45		70	105	16
	GE 80 FW - 2RS	80		130	0 -0,018	75		50	0 -0,50	80	115	14
	GE 90 FW - 2RS	90		150		85		55		90	130	15
	GE 100 FW - 2RS	100	0 -0,020	160	0 -0,025	85	0 -0,20	55		100	140	14
	GE 110 FW - 2RS	110		180		100		70		110	160	12
	GE 120 FW - 2RS	120		210	0 -0,030	115		70	0 -0,60	120	180	16
	GE 140 FW - 2RS	140		230		130		80		140	200	16
	GE 160 FW - 2RS	160	0 -0,025	260	0 -0,035	135	0 -0,25	80	0 -0,70	160	225	16
	GE 180 FW - 2RS	180		290		155		100		180	250	14
	GE 200 FW - 2RS	200		320		165		100		200	275	15
	GE 220 FW - 2RS (∞)	220	0 -0,030	340	0 -0,040	175	0 -0,30	100	0 -0,80	220	300	16
	GE 240 FW - 2RS (∞)	240		370		190		110		240	325	15
	GE 260 FW - 2RS (∞)	260		400		205		120		260	350	15
	GE 280 FW - 2RS (∞)	280	0 -0,035	430	0 -0,045	210	0 -0,35	120	0 -0,90	280	375	15

COEFF. DI CARICO Dinam. C Stat. Co				GIUOCO RADIALE		DISTANZA DAGLI SPIGOLI r1 min. r2 min.		DIMENSIONI DI MONTAGGIO da max. da min.		PFWO
KN				mm.		mm.		mm.		Kg.
5,8	14			0	- 0,032	0,3	- 0,3	9,3	12,5	0,008
8,6	21			0	- 0,032	0,3	- 0,3	11,6	15,5	0,014
11	28			0	- 0,032	0,3	- 0,3	13,4	17,5	0,020
18	45			0	- 0,040	0,3	- 0,3	16,0	21,0	0,034
22	22,4	56	56	0	- 0,040	0,3	- 0,3	19,2	21,0	0,046
31	31,5	78	78	0	- 0,040	0,3	- 0,3	21,0	27,5	0,078
51	51	127	127	0	- 0,050	0,6	- 0,6	25,2	33,0	0,15
65	65,5	166	166	0	- 0,050	0,6	- 0,6	29,5	38,0	0,19
83	210	212	350	0	- 0,050	0,6	- 1,00	34,4	44,5	0,29
277	462			0	- 0,060	0,6	- 1,0	39,7	51,0	0,39
360	600			0	- 0,060	0,6	- 1,0	44,7	57,0	0,52
442	737			0	- 0,060	0,6	- 1,0	50,0	63,0	0,68
690	1150			0	- 0,060	0,6	- 1,0	57,1	75,0	1,4
885	1475			0	- 0,072	1,0	- 1,0	67,0	87,0	2,0
1125	1875			0	- 0,072	1,0	- 1,0	78,2	99,0	2,9
1380	2300			0	- 0,072	1,0	- 1,0	87,1	108,0	3,5
1717	2862			0	- 0,085	1,0	- 1,0	98,3	123,0	5,4
1845	3075			0	- 0,085	1,0	- 1,0	111,2	134,0	5,9
2685	4475			0	- 0,085	1,0	- 1,0	124,8	150,0	9,7
3015	5025			0	- 0,085	1,0	- 1,0	138,4	173,0	15,0
3840	6400			0	- 0,100	1,0	- 1,0	151,9	191,0	18,5
4320	7200			0	- 0,100	1,0	- 1,1	180,0	219,0	25,0
6000	10000			0	- 0,100	1,1	- 1,1	196,1	239,0	35,5
6600	11000			0	- 0,100	1,1	- 1,1	220,0	267,0	45,0
7200	12000			0	- 0,100	1,1	- 1,1	243,6	295,0	51,0
8550	14250			0	- 0,100	1,1	- 1,1	263,6	319,0	64,0
10050	16750			0	- 0,110	1,1	- 1,1	283,6	342,0	81,0
10800	18000			0	- 0,110	1,1	- 1,1	310,6	370,0	94,0

DISPONIBILI SU RICHIESTA DISEGNI IN 3D. 3D VERSION AVAILABLE UPON REQUEST. VERSION 3D DISPONIBLE SUR DEMANDE. 3D VERSION AUF ANFRAGE VERFÜGBAR.
(▲) DISPONIBILITÀ E PREZZO A RICHIESTA. (▲) AVAILABILITY AND PRICE UPON REQUEST. (▲) DISPONIBILITÉ ET PRIX SUR DEMANDE. (▲) VERFÜGBARKEIT UND PREIS AUF ANFRAGE.