

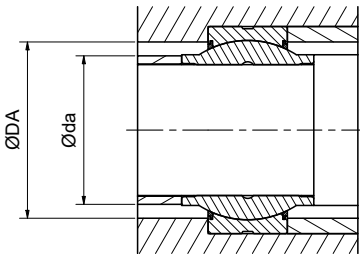


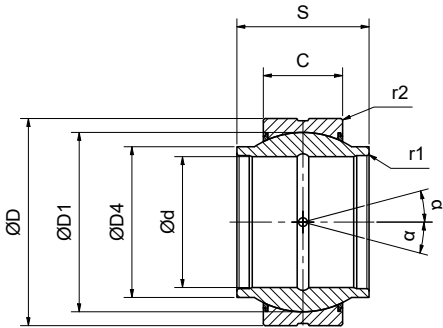

GE--HO-2RS

RADIAL BALL JOINTS
ROTULES
RADIALKUGELGELENKE

RICHIEDENTI MANUTENZIONE
ACCOPIAMENTO: ACCIAIO SU ACCIAIO
PARTS TO BE SERVICED
COUPLING: STEEL / STEEL
PIECES A ENTREtenir
ACCOUPLEMENT: ACIER / ACIER
WARTUNGSBEDÜRFTIG
STAHL / STAHL - PAARUNG



ART.	d	tolleranza d	D	tolleranza D	S	tolleranza S	C	tolleranza C	d	D1	D4 max.	α
	mm.								mm.			gradi
GE 17 HO - 2RS	17	⁰ -0,008	30	⁰ -0,009	21	±0,2	10	⁰ -0,24	17	25	21	3
GE 20 HO - 2RS	20	⁰ -0,010	35	⁰ -0,011	24		12		20	29	24	3
GE 25 HO - 2RS	25		42		29		16		25	35,5	29	3
GE 30 HO - 2RS	30	⁰ -0,012	47	⁰ -0,013	30	±0,3	18	⁰ -0,30	30	40,7	34	3
GE 35 HO - 2RS	35		55		35		20		35	47	40	3
GE 40 HO - 2RS	40		62		38		22		40	53	45	3
GE 45 HO - 2RS	45		68		40		25		45	60	51,5	3
GE 50 HO - 2RS	50	⁰ -0,015	75	⁰ -0,015	43		28	⁰ -0,40	50	66	56,5	3
GE 60 HO - 2RS	60		90		54		36		60	80	67,7	3
GE 70 HO - 2RS	70		105		65		40		70	92	78	3
GE 80 HO - 2RS	80		120		74		45		80	105	90	3

COEFF. DI CARICO		GIUOCO RADIALE	DISTANZA DAGLI SPIGOLI		DIMENSIONI DI MONTAGGIO	PESO
Dinam. C	Stat. Co		r1 min.	r2 min.		
KN		mm.	mm.		mm.	Kg.
21,2	106	0,040 - 0,082	0,2	- 0,3	24	0,040
30	146	0,040 - 0,082	0,2	- 0,3	27,5	0,066
48	240	0,050 - 0,100	0,2	- 0,6	33	0,114
62	310	0,050 - 0,100	0,2	- 0,6	38	0,14
80	400	0,050 - 0,100	0,3	- 1,0	44,5	0,24
100	500	0,060 - 0,120	0,3	- 1,0	51	0,29
127	640	0,060 - 0,120	0,3	- 1,0	57	0,43
156	780	0,060 - 0,120	0,3	- 1,0	63	0,54
245	1220	0,060 - 0,120	0,3	- 1,0	75	1,10
315	1560	0,072 - 0,142	0,3	- 1,0	87	1,60
400	2000	0,072 - 0,142	0,3	- 1,0	99	2,40