




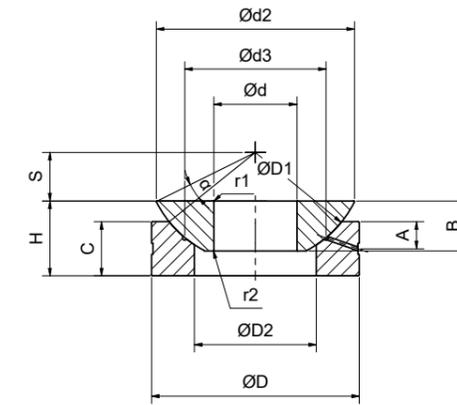

GE--AX

AXIAL BALL JOINTS
ROTULES AXIALES
AXIALKUGELGELENKE

ISO 12240-3
RICHIEDENTI MANUTENZIONE
ACCOPIAMENTO: ACCIAIO SU ACCIAIO
PARTS TO BE SERVICED
COUPLING: STEEL / STEEL
PIECES A ENTREtenir
ACCOUPLMENT: ACIER / ACIER
WARTUNGSBEDÜRFTIG
STAHL / STAHL - PAARUNG



ART.	d	tolleranza d	D	tolleranza D	H	tolleranza H	D1	D2	d2	d3	B	tolleranza B	C	tolleranza C		
	mm.															
GE 10 AX	10		30	+0 -0,009	9,5		32	16,5	27,5	21	7,9		6			
GE 12 AX	12	+0 -0,008	35	+0 -0,011	13		37	19,5	32	24	9,3		9			
GE 15 AX	15		42		15		45	24	38,9	29	10,7		11			
GE 17 AX	17		47		16		50	28	43,4	34	11,5		11,5			
GE 20 AX	20	+0 -0,010	55	+0 -0,013	20		60	33,5	50	40	14,3	+0 -0,24	13	+0 -0,24		
GE 25 AX	25		62		22,5		66	34,5	57,5	45	16		17			
GE 30 AX	30		75		26		80	44	69	56	18		19,5			
GE 35 AX	35	+0 -0,012	90	+0 -0,015	28	+0 -0,40	98	52	84	66	22		20			
GE 40 AX	40		105		32		114	59	98	78	27		22			
GE 45 AX	45		120		36,5		130	68	112	89	31		25			
GE 50 AX	50	+0 -0,018	130	+0 -0,018	42,5		140	69	122,5	98	33,5		32			
GE 60 AX	60		150		45		160	86	140	108	37		33			
GE 70 AX	70		160		50		170	95	149,5	121	40		36		+0 -0,30	+0 -0,30
GE 80 AX	80	+0 -0,020	180	+0 -0,025	50		194	108	168	130	42		36			
GE 100 AX	100		210		59		220	133	195,5	155	50		42		+0 -0,40	+0 -0,40
GE 120 AX (▲)	120		230		64		245	154	214	170	52		45		+0 -0,50	+0 -0,50
GE 140 AX (▲)	140	+0 -0,025	260	+0 -0,030	72	+0 -0,50	272	176	244	198	61		50			
GE 140 AX (▲)	160		290		77		310	199	272	213	65		52		+0 -0,50	+0 -0,50
GE 180 AX (▲)	180		320		86		335	224	300	240	70		60			
GE 200 AX (▲)	200	+0 -0,030	340	+0 -0,040	87	+0 -0,60	358	246	321	265	74	+0 -0,60	60	+0 -0,60		

d	s	A	Gradi	COEFF. DI CARICO (ASSIALE)		DISTANZA DAGLI SPIGOLI		DIMENSIONI DI MONTAGGIO		PESO
				Dinam. C	Stat. Co	r1 min.	r2 min.	d _i max.	D _i max.	
				KN		mm.		mm.		Kg.
10	7	3	10	24	120	0,6	- 0,2	21	18,5	0,04
12	8	4	9	32,5	163	0,6	- 0,2	24	21,5	0,07
15	10	5	7	52	260	0,6	- 0,2	29	26	0,12
17	11	5	6	58,5	300	0,6	- 0,15	34	30,5	0,16
20	12,5	6	6	75	385	1,0	- 0,3	40	38	0,25
25	14	6	7	129	640	1,0	- 0,3	45	39	0,38
30	17,5	8	6	170	850	1,0	- 0,3	56	49	0,65
35	22	8	6	260	1290	1,0	- 0,3	66	57	1,0
40	24,5	9	6	375	1860	1,0	- 0,3	78	64	1,6
45	27,5	11	6	490	2450	1,0	- 0,3	89	74	2,4
50	30	10	5	655	3250	1,0	- 0,3	98	75	3,3
60	35	12,5	7	735	3650	1,0	- 0,3	108	92	4,5
70	35	13,5	6	800	4050	1,0	- 0,3	121	102	5,5
80	42,5	14,5	6	1040	5200	1,0	- 0,3	130	115	7,0
100	45	15	7	1200	6000	1,0	- 0,3	155	141	10,5
120	52,5	16,5	8	1250	6200	1,0	- 0,3	170	162	13,0
140	52,5	23	6	1630	8150	1,5	- 0,6	198	187	18,0
160	65	23	7	1900	9500	1,5	- 0,6	213	211	23,0
180	67,5	26	8	2120	10600	1,5	- 0,6	240	236	31,0
200	70	27	8	2360	11800	1,5	- 0,6	265	259	34,0

DISPONIBILI SU RICHIESTA DISEGNI IN 3D. 3D VERSION AVAILABLE UPON REQUEST. VERSION 3D DISPONIBLE SUR DEMANDE. 3D VERSION AUF ANFRAGE VERFÜGBAR.
(▲) DISPONIBILITÀ E PREZZO A RICHIESTA. (▲) AVAILABILITY AND PRICE UPON REQUEST. (▲) DISPONIBILITÉ ET PRIX SUR DEMANDE. (▲) VERFÜGBARKEIT UND PREIS AUF ANFRAGE.